


AQUALISA

MIDAS™ 110 SHOWER COLUMN MIXER

MD110SC

WITH ADJUSTABLE HEAD AND FIXED DRENCHER
- HP/COMBI

DIMENSIONAL DRAWINGS

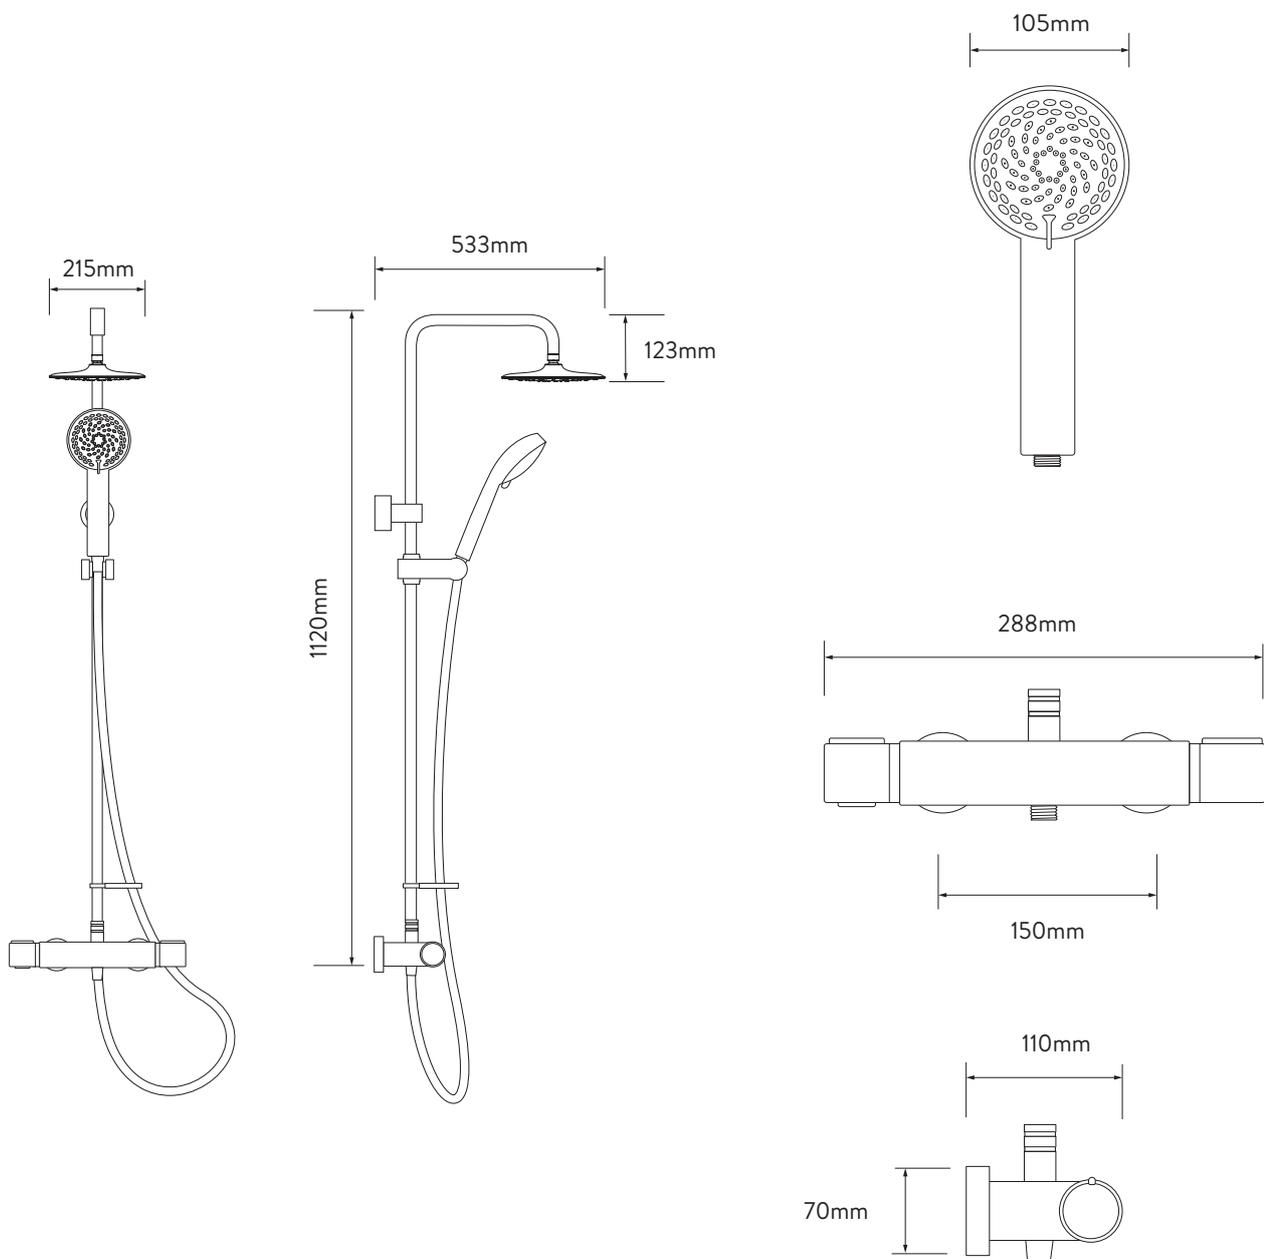

*Pipe centres can be adjusted between 130mm-170mm using supplied elbows

The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

AQUALISA

MIDAS™ 110 SHOWER COLUMN MIXER

MD110SC

WITH ADJUSTABLE HEAD AND FIXED DRENCHER
- HP/COMBI

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1.0 bar
Maximum pressure requirements	10 bar
Inlet fitting connections	3/4" BSP
Inlet supply positions	Hot/left, cold/right (as viewed from front)
Outlet connections	1/2" BSP (Hose outlet only)
Valve inlet centres	150mm Pipe centres can be adjusted between 130 - 170mm using the elbows supplied
Supply temperature	5 - 20°C Cold Supply
	55 - 65°C Hot Supply
Materials	Brass
	Metal and plastic
Water system	Boosted gravity
	Combi and balanced High Pressure systems
Features	Thermosafe
	Safe touch
	105mm, 4 spray patterns
Colour	Chrome
Approvals	WRAS Approval pending
Guarantee period	Valve - 5 years
	Shower head and kit - 2 years