


AQUALISA

ZURI™ SMART EXPOSED


ZURI1HPE

WITH ADJUSTABLE HEAD - HP/COMBI

DIMENSIONAL DRAWINGS

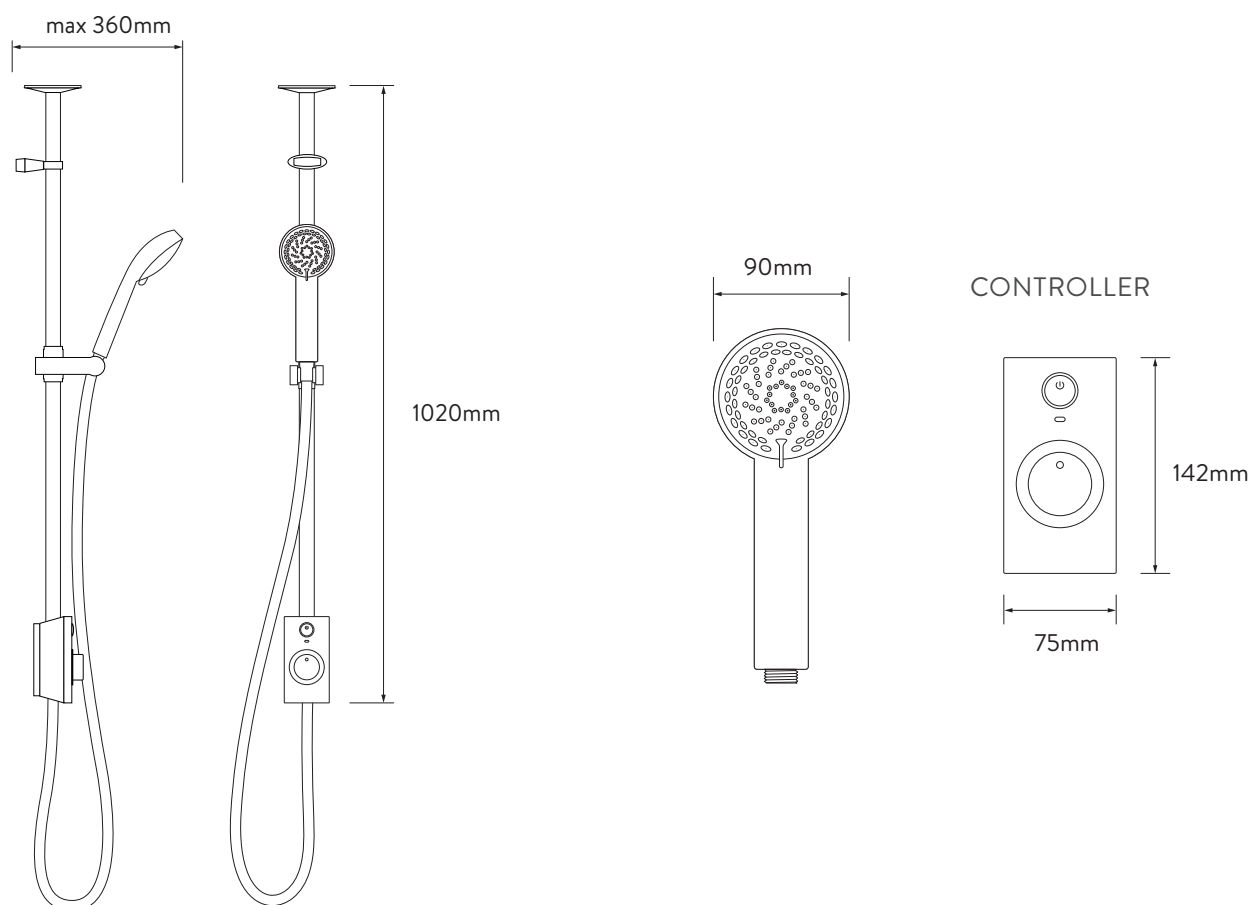

PROCESSOR

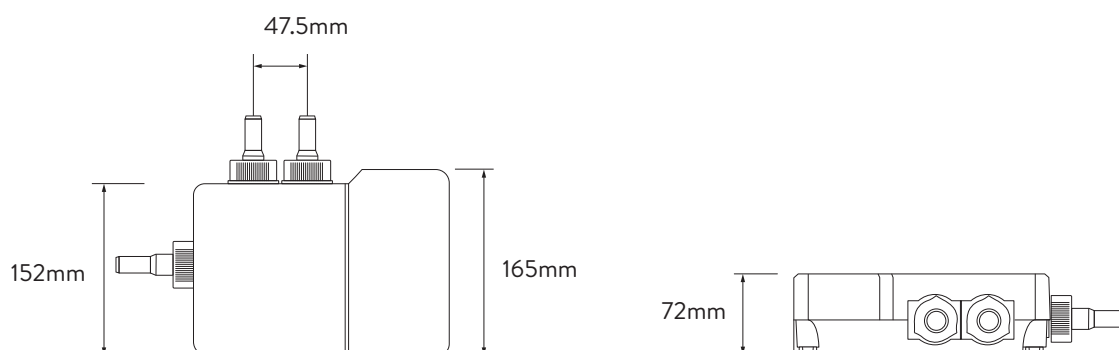

AQUALISA

ZURI™ SMART EXPOSED

ZURI1HPE

WITH ADJUSTABLE HEAD - HP/COMBI

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 bar
Maximum pressure requirements	7 bar
Processor inlet fitting connections	15mm push fit
Processor outlet fitting connection	15mm push fit
Valve inlet centres	55cm
Permissible processor sitting location	Accessible location for servicing and not where ambient temperature exceeds 40° or cooler than 0° and no higher than the base level of the cistern
Supply temperature	65° Max
Water system	HP/Combi
Features	Easy glide temperature control
	One touch, push button start/stop
	LED display indicates when chosen temperature has been reached
	Eco-mode can reduce flow up to 33%
	Ability to set a preferred outlet
	Optional remote control
	4 spray patterns, including an eco-setting
Colour	White / Chrome
Guarantee period	5 years
Approvals	CE Marking
	BEAB
	TMV2