

# AQUALISA



## QUARTZ™ SMART DUAL OUTLET EXPOSED

QZD.A1.EV.  
DVFC.18


WITH ADJUSTABLE HEAD AND FIXED CEILING  
DRENCHER - HP/COMBI

### DIMENSIONAL DRAWINGS


Ceiling arm can be cut shorter to suit ceiling height

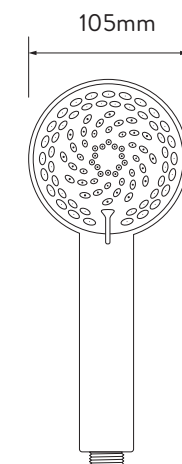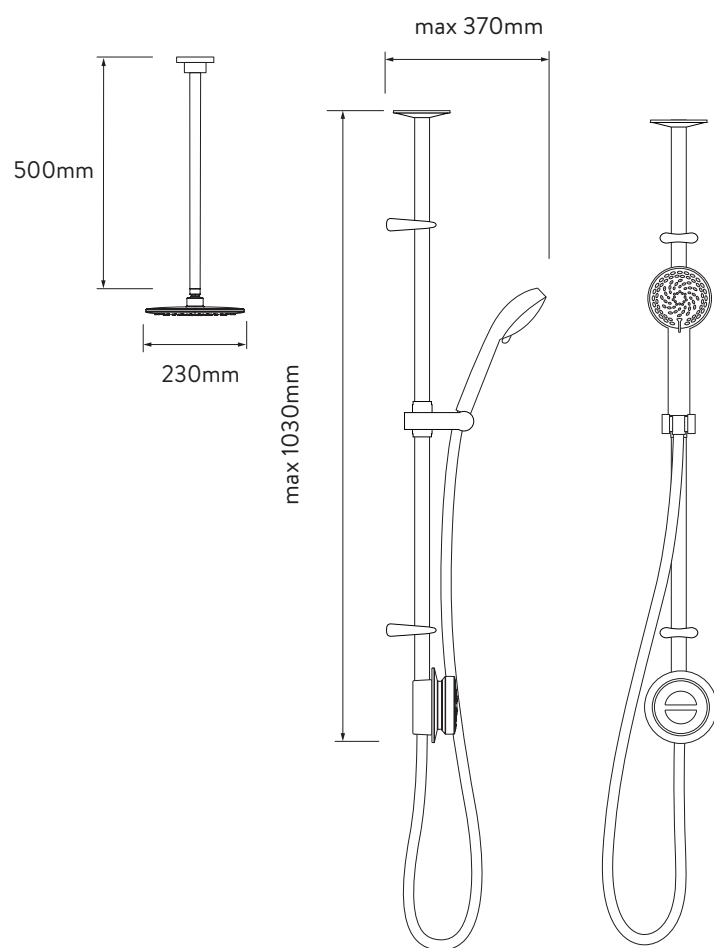




CONTROLLER

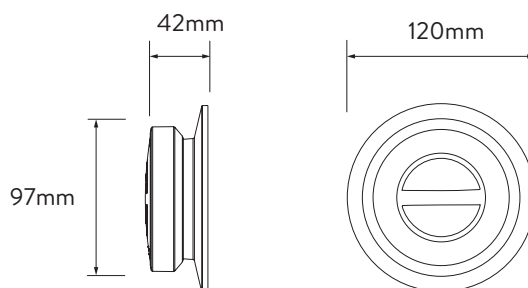

PROCESSOR

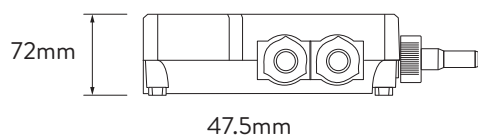

DIVERTER

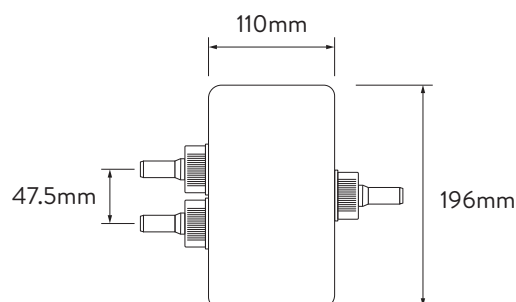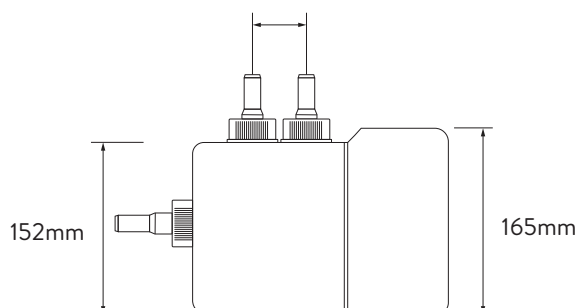

The company reserves the right to alter, change or modify the product or product specifications without prior warning.  
Please refer to the installation guides for technical information.

# AQUALISA

## QUARTZ™ SMART DUAL OUTLET EXPOSED

QZD.A1.EV.  
DVFC.18

WITH ADJUSTABLE HEAD AND FIXED CEILING  
DRENCHER - HP/COMBI

### TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 bar
Maximum pressure requirements	7 bar
Processor inlet fitting connections	15mm push fit
Valve inlet centres	48mm
Inlet supply positions	Hot right, cold left
Processor outlet fitting connection	15mm push fit
Permissible processor sitting location	Loft, airing cupboard, under bath
Supply temperature	Cold inlet temperature 1°C (minimum) Cold inlet temperature 15°C (maximum) Hot inlet temperature 65°C (maximum)
Water system	HP / Combi / Boosted gravity
Features	One touch start/stop control
	LED display indicates when pre-selected temperature has been reached
	Compatible with wired remote control
	On installation, you can select the shower outlet you want to start first every time
	Digital diverter technology
	105mm, 4 spray patterns (adjustable head) including eco-spray option
Colour	Chrome
Guarantee period	5-year guarantee – shower unit
	2-year guarantee – shower head and kit
Approvals	CE Marking
	BEAB