

AQUALISA


eMOTION™

ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
 - MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
 - CHROME PLATED


| | | |
|----------------|--------|---------|
| MIDNIGHT BLACK | 8.5KW | MOBC85 |
| | 9.5KW | MOBC95 |
| | 10.5KW | MOBC105 |
| ARCTIC WHITE | 8.5KW | MOWC85 |
| | 9.5KW | MOWC95 |
| | 10.5KW | MOWC105 |
| SPACE GREY | 8.5KW | MOGC85 |
| | 9.5KW | MOGC95 |
| | 10.5KW | MOGC105 |

DIMENSIONAL DRAWINGS

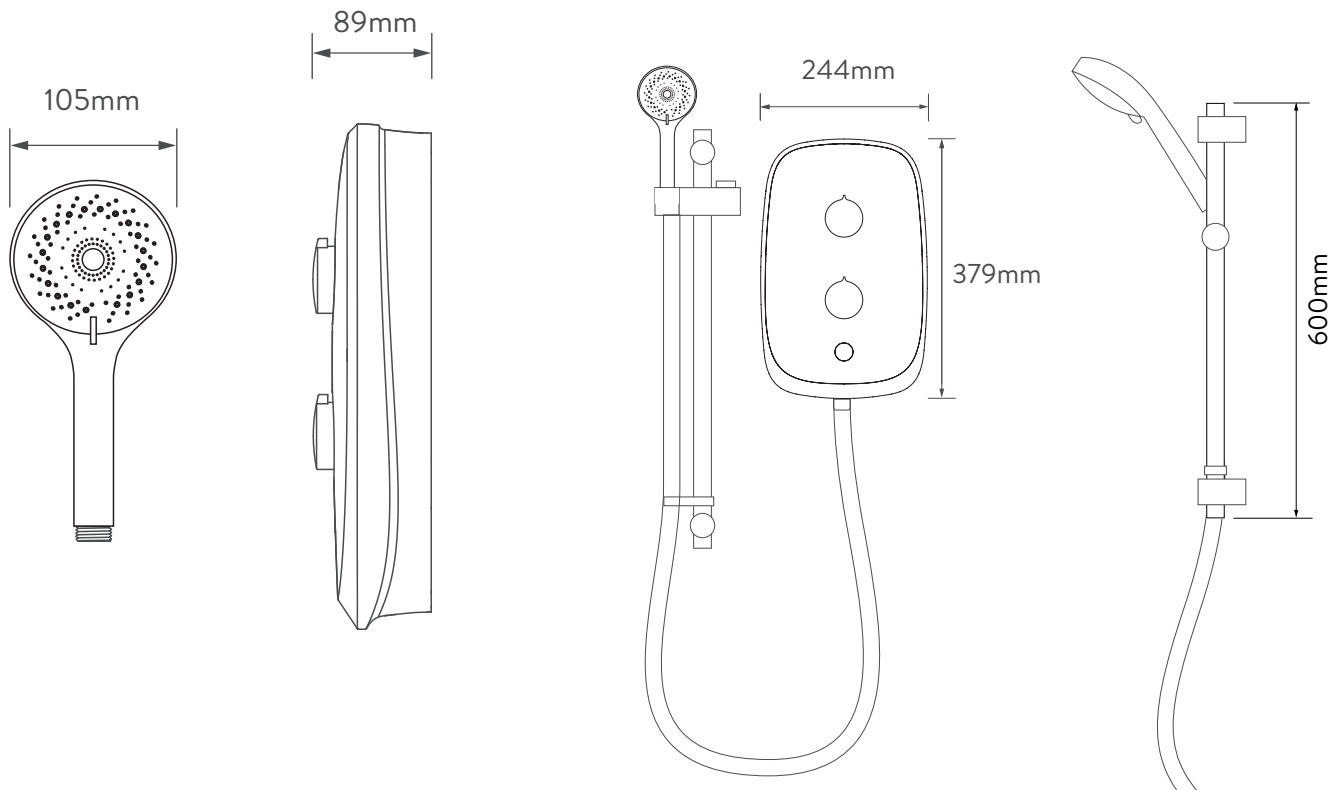

CONNECTIONS

⚡ ELECTRICAL
 💧 WATER

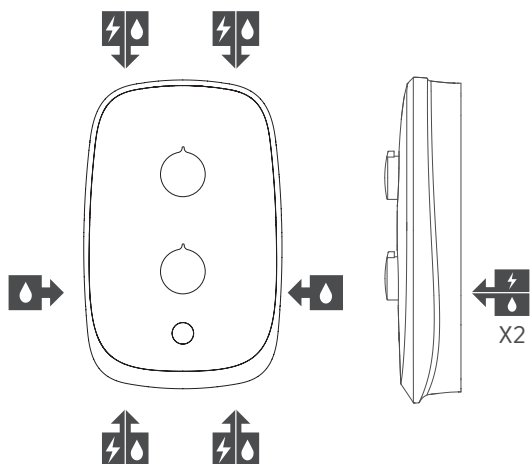

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.

AQUALISA

eMOTION™

ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
 - MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
 - CHROME PLATED

| | | |
|----------------|--------|---------|
| MIDNIGHT BLACK | 8.5KW | MOBC85 |
| | 9.5KW | MOBC95 |
| | 10.5KW | MOBC105 |
| ARCTIC WHITE | 8.5KW | MOWC85 |
| | 9.5KW | MOWC95 |
| | 10.5KW | MOWC105 |
| SPACE GREY | 8.5KW | MOGC85 |
| | 9.5KW | MOGC95 |
| | 10.5KW | MOGC105 |

TECHNICAL SPECIFICATIONS

| | |
|------------------------------|-------------------------------------------------------------------------------|
| Power | 8.5KW / 9.5KW / 10.5KW |
| Minimum pressure | 0.085 MPa (0.85 bar) Recommended: 1 bar |
| Maximum pressure | 1.0 MPa (10 bar) |
| Recommended maximum pressure | 3 bar |
| Water entry points | Right hand side and left hand side: top, bottom, side and rear |
| Cable entry points | Right hand side and left hand side: top, bottom and rear |
| Inlet fitting connections | 15mm compression or push fit elbow |
| Outlet fitting connections | 1/2" BSP thread |
| Electric requirements | Supply voltage 230 – 240V, MCB rating : 8.5KW and 9.5KW - 40A 10.5KW - 45/50A |
| Water system | Mains cold system |
| Features | Digital temperature display |
| | Push button start/stop |
| | Rotary controls (power control rotary control) |
| | Safety features: Phased shut down, Over temperature protection |
| | Low pressure indicator |
| | Stainless steel hose |
| | 105mm handset, 3 spray patterns (splash or flow handset) |
| Colour | Midnight Black / Space Grey / Arctic White |
| Trim colour | Chrome Plated |
| Guarantee period | Shower unit – 2 years |
| | Shower head and kit – 2 years |
| Approvals | CE Marking |
| | BEAB |
| | European Water Label |
| | ERP Directive |
| | WRAS |