

# AQUALISA


## SAFE TOUCH SQUARE SHOWER COLUMN

AQSQBAR2  
.INT

HP  
CHROME

---

### DIMENSIONAL DRAWINGS

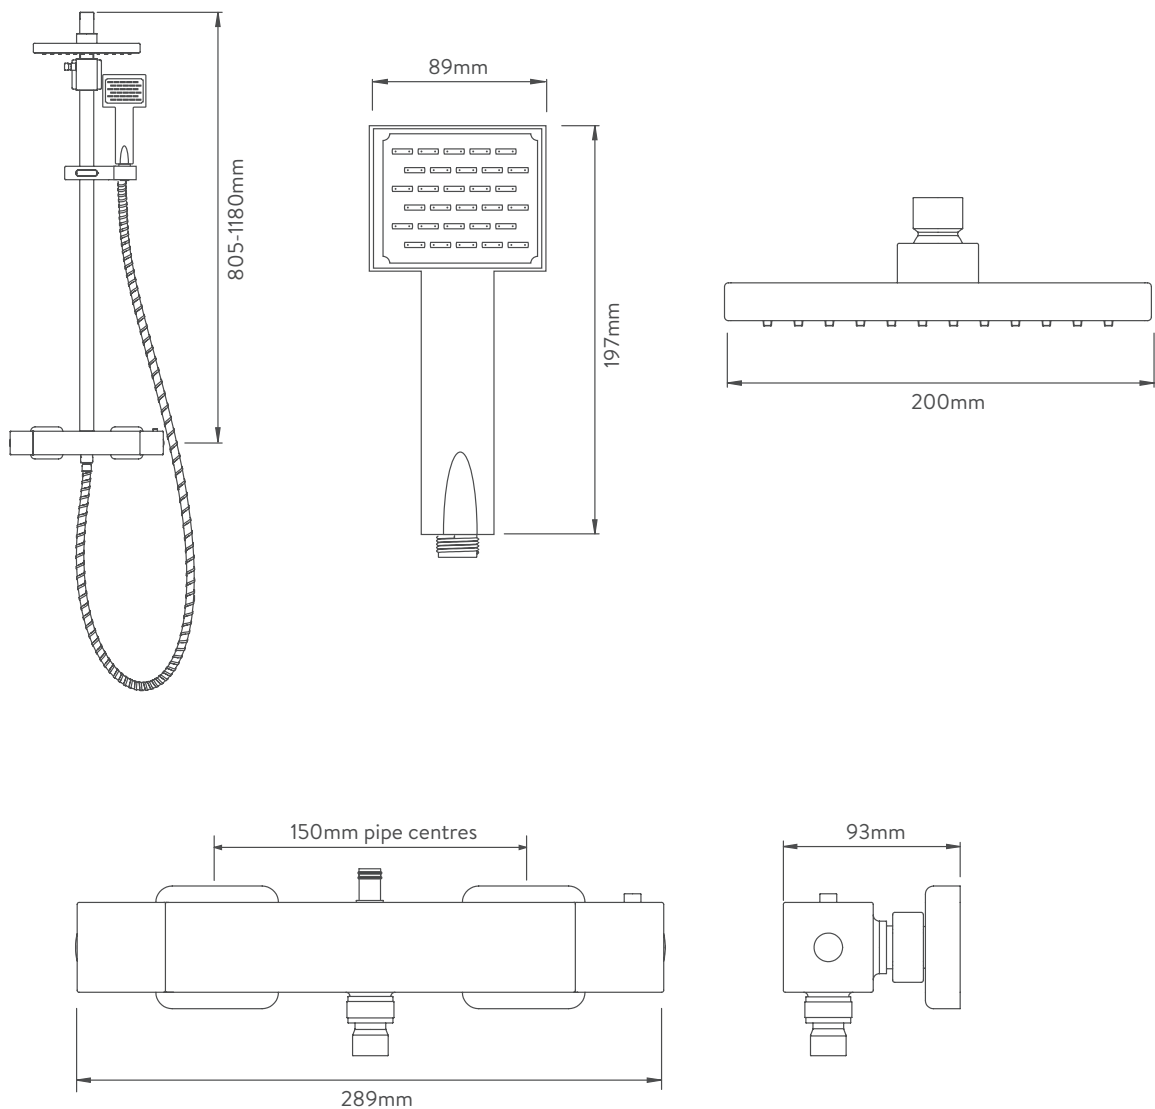

# AQUALISA

## SAFE TOUCH SQUARE SHOWER COLUMN

AQSQBAR2  
.INT

HP  
CHROME

### TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 bar
Maximum pressure requirements	5 bar
Flow rates @ 3 bar	Adjustable head: 13.2 l/min Fixed head: 9.39 l/min
Inlet fitting connections	3/4" Threaded
Rear inlet supply positions	150mm centres
Outlet connections	1/2" Thread
Valve inlet centres	150mm centres
Supply temperature	Max 65°C
Water system	High Pressure
Features	Separate temperature control with override button for extra safety
	Brass "Safe Touch" body
	Flow control with integral diverter to switch between shower heads
	Includes Easy fit wall brackets
	Soft rub nozzles for easy cleaning
	1 + 1 spray patterns
	Adjustable telescopic shower column 805mm - 1180mm
	200mm fixed drencher head, 89mm adjustable head
1.5m chrome plated stainless steel hose (11mm bore)	
Colour	Chrome
Guarantee period	5 years