

AQUALISA


MIDAS™ 220

SHOWER COLUMN

MD220SC.INT

WITH ADJUSTABLE HEAD AND FIXED DRENCHER
- HP/COMBI

DIMENSIONAL DRAWINGS

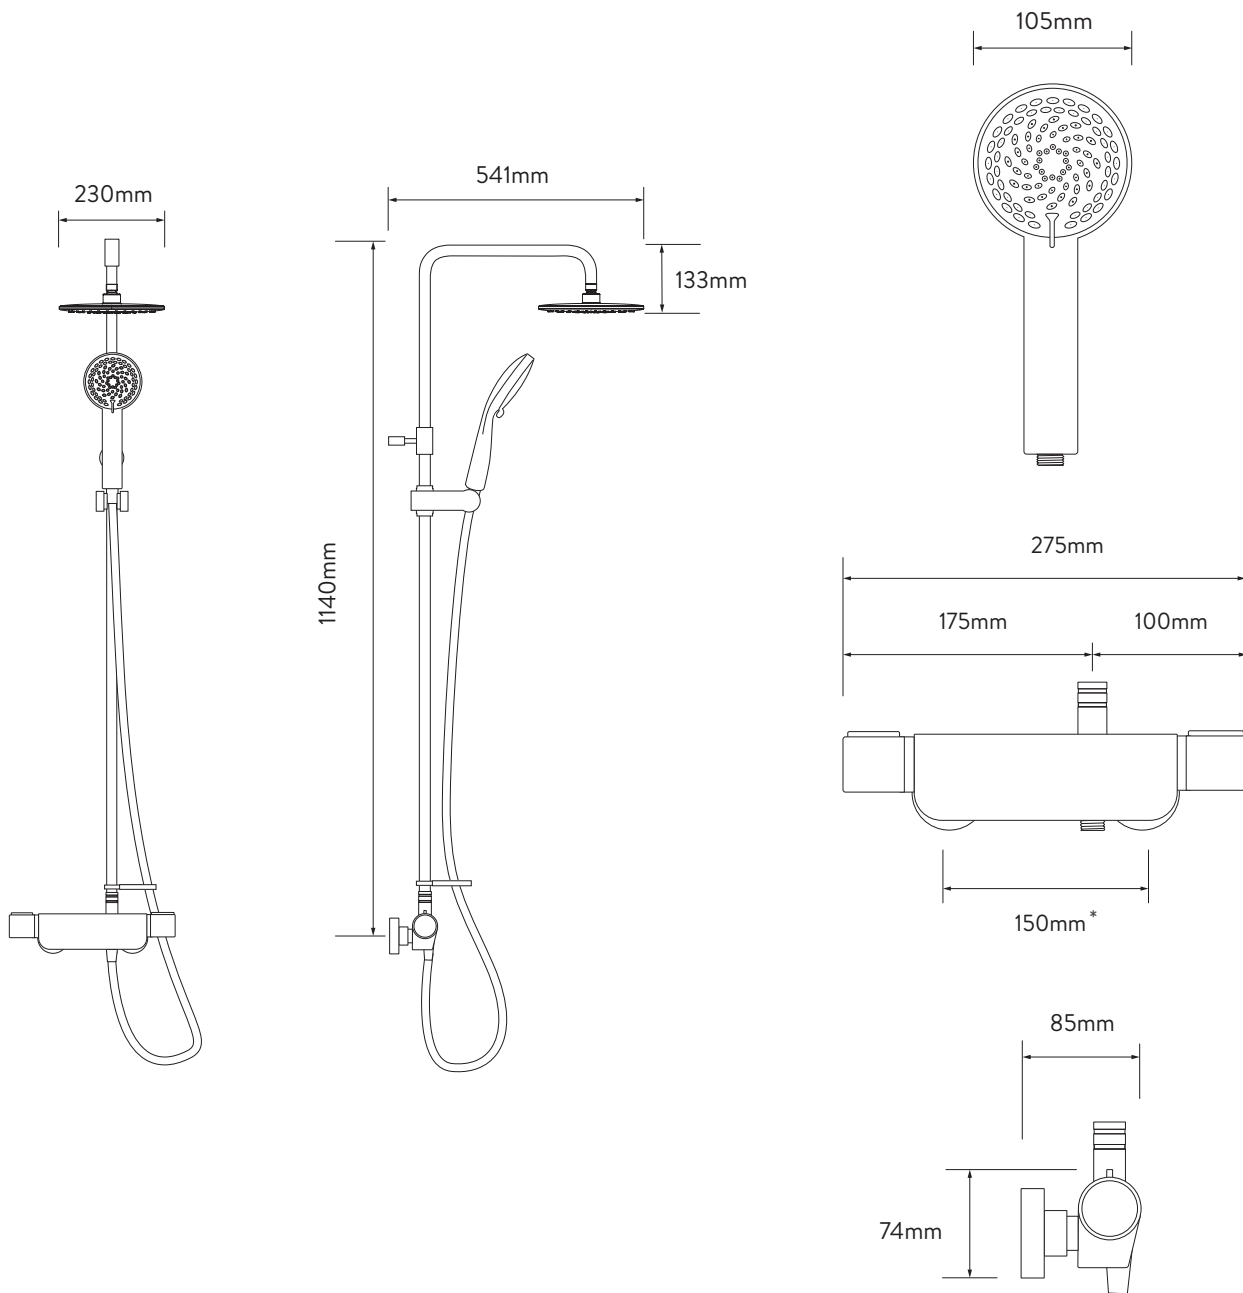

*Pipe centres can be adjusted between 130mm-170mm using supplied elbows

AQUALISA

MIDAS™ 220

SHOWER COLUMN

MD220SC.INT

WITH ADJUSTABLE HEAD AND FIXED DRENCHER
- HP/COMBI

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 bar
Maximum pressure requirements	10 bar
Inlet fitting connections	3/4" BSP
Inlet supply positions	Hot/left, cold/right (as viewed from the front)
Outlet connections	1/2" BSP
Valve inlet centres	150mm (Pipe centres can be adjusted between 130mm-170mm using supplied elbows)
Supply temperature	5 - 20°C Cold Supply
	55 - 65°C Hot Supply
Materials	Brass
	Metal and plastic
Water System	Boosted gravity
	Combi and balanced High Pressure systems
Features	Thermosafe
	Diverter
	Adjustable height slider
	Flow control
	Safe touch
	105mm, 4 spray patterns one of which is eco - 25% less flow
Colour	Chrome
Approvals	WRAS Approval pending
Guarantee period	Valve - 5 years
	Shower head and kit - 2 years