

# AQUALISA


## MIDAS™ 220

### SHOWER COLUMN

MD220SC.  
MB.INT

HP/COMBI - MATT BLACK

#### DIMENSIONAL DRAWINGS

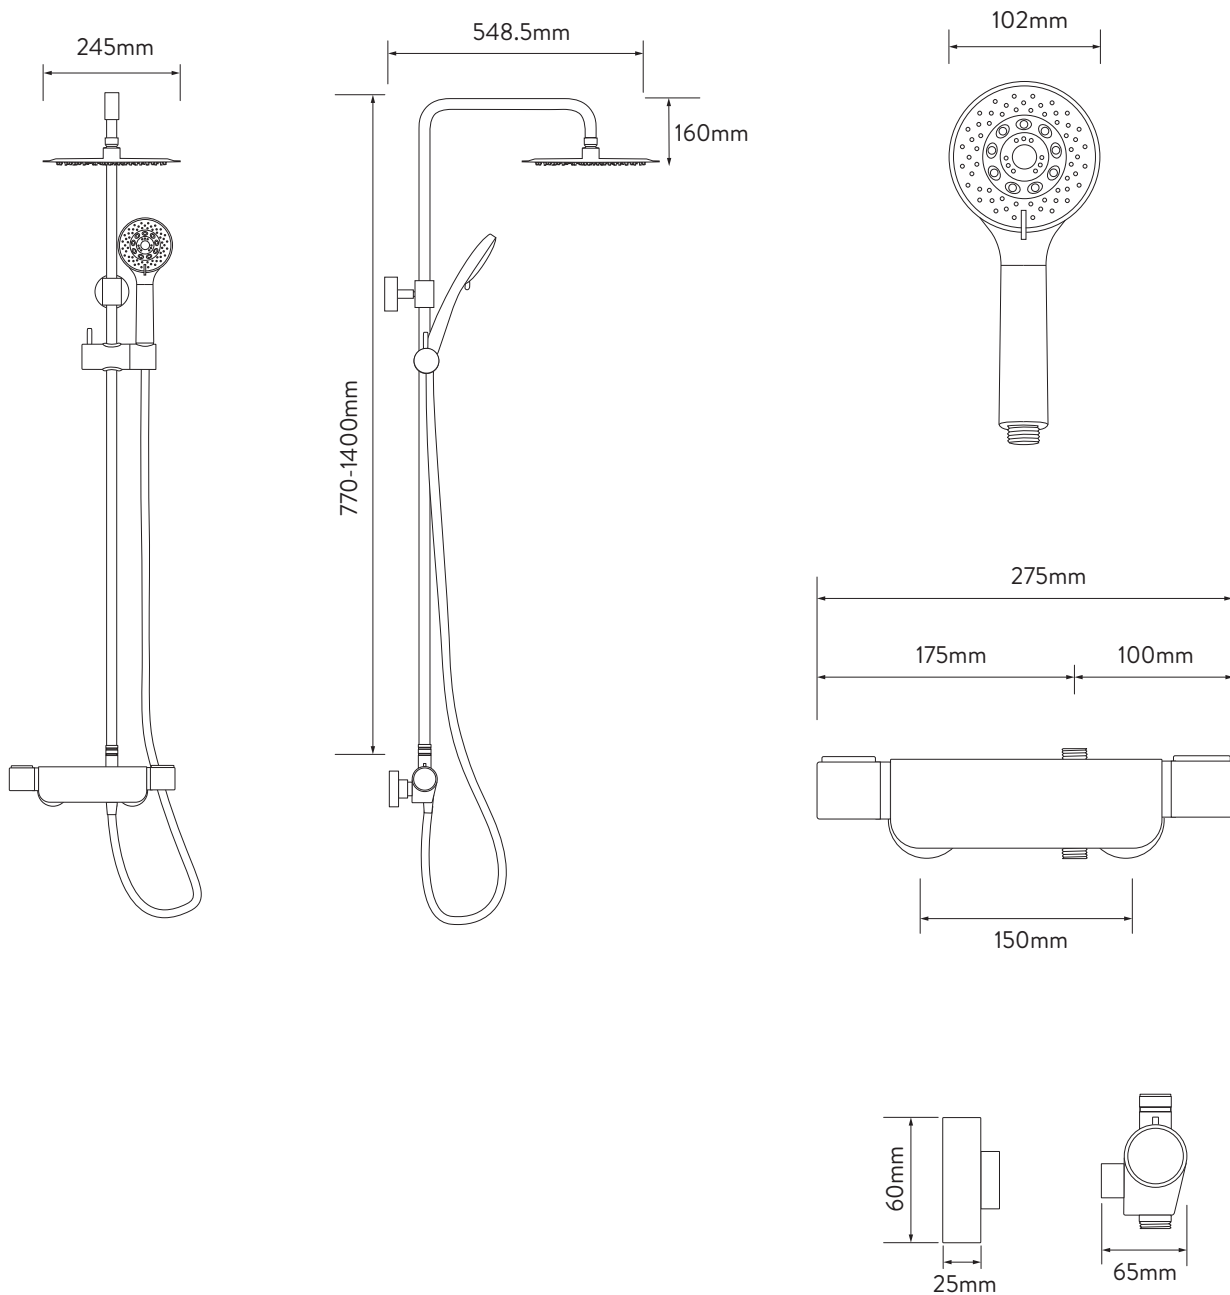

\* For retrofit installations the pipe centres can be adjusted between 130mm-170mm using eccentric elbows (not supplied).  
Part number 911139 .

The company reserves the right to alter, change or modify the product or product specifications without prior warning.  
Please refer to the installation guides for technical information.

Issue 01 March 2023

# AQUALISA

## MIDAS™ 220

### SHOWER COLUMN



HP/COMBI - MATT BLACK

---

#### TECHNICAL SPECIFICATIONS

Minimum pressure requirements	0.1 bar
Maximum pressure requirements	10 bar
Inlet fitting connections	3/4" BSP
Inlet supply positions	Hot/left, cold/right (as viewed from the front)
Outlet connections	1/2" BSP
Inlet supply pipe	15mm - when utilising the fixing kit provided
Valve inlet centres	150mm
Supply temperature	5 - 20°C Cold Supply
	55 - 65°C Hot Supply
Materials	Metal and plastic
Water System	Boosted Gravity* *May require Universal (negative head) pump. Refer to installation guide
	Combi and balanced High Pressure systems
Features	Thermosafe
	Separate temperature control with override button for extra safety
	Includes easy fit wall brackets
	245mm fixed head
	Adjustable telescopic shower column 770-1400mm
	Adjustable height slider
	Flow control with integral diverter to switch between shower heads
	Safe touch
	102mm, 5 mode handset with soft rub nozzles for easy cleaning
	1.5m steel hose
Colour	Matt Black
Approvals	WRAS Approval pending
Guarantee period	Valve - 5 years
	Shower head and kit - 2 years