

# ELISA™

## Aquahub™

COMPATIBLE WITH:

DC001CH.INT / DC001BB.INT / DC001MB.INT

DC002CH.INT / DC002BB.INT / DC002MB.INT

DC003CH.INT / DC003BB.INT / DC003MB.INT




PB002CH.INT / PB002BB.INT / PB002MB.INT

PB003CH.INT / PB003BB.INT / PB003MB.INT

AQUAHUB UNIVERSAL CONCEDED INSTALLATION BOX - AHUB1

---

### DIMENSIONAL DRAWINGS

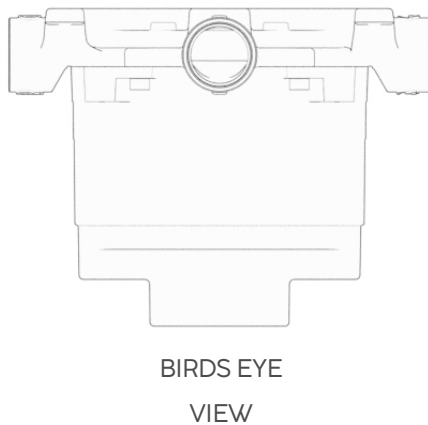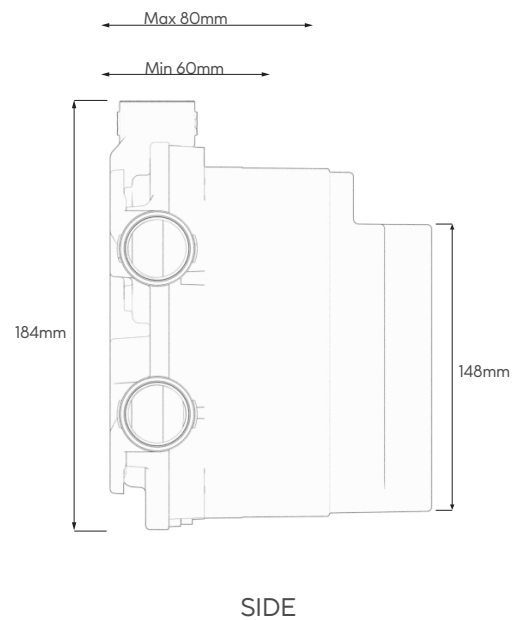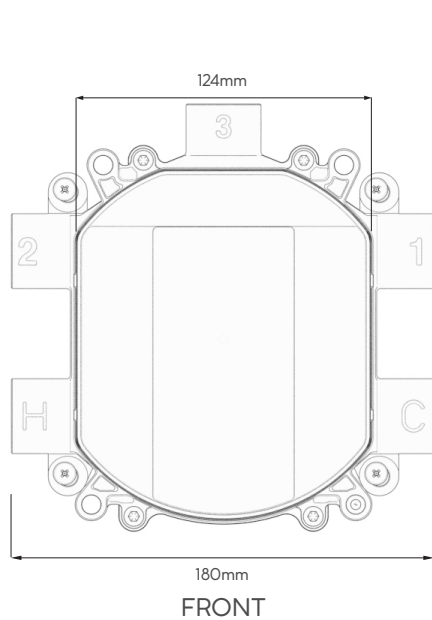

# ELISA™

## Aquahub™

COMPATIBLE WITH:

DC001CH.INT / DC001BB.INT / DC001MB.INT  
DC002CH.INT / DC002BB.INT / DC002MB.INT  
DC003CH.INT / DC003BB.INT / DC003MB.INT  
PB002CH.INT / PB002BB.INT / PB002MB.INT  
PB003CH.INT / PB003BB.INT / PB003MB.INT

AQUAHUB CONCEALED UNIVERSAL MIXER

---

### TECHNICAL SPECIFICATIONS

Min Pressure	1 bar
Max Pressure	10 bar
Fitting connections	3/4"
Outlet connections	3/4"
Inlet supply positions	Left hot, Right cold
Features	Front and rear mounting options
	2 stage fixing for 1st and 2nd fix installations
	Slim 60mm minimum installation depth
	Reversible inlets in case plumbed incorrectly
	One box suitable for 1,2 and 3 outlets as well as push button or dial operation
	Intergrated isolation valves
	8 fixing points for flexible installation
	Theromstatically controlled
	Flow control
	Quality brass valve
Flush block testing plate	
Guarantee period	15 years (Please see guarantee Ts and Cs for more information)