


# AQUALISA

## QUARTZ BLUE™ CONCEALED


QZSB.A2.BV.20

WITH ADJUSTABLE HEAD - GRAVITY PUMPED

### DIMENSIONAL DRAWINGS

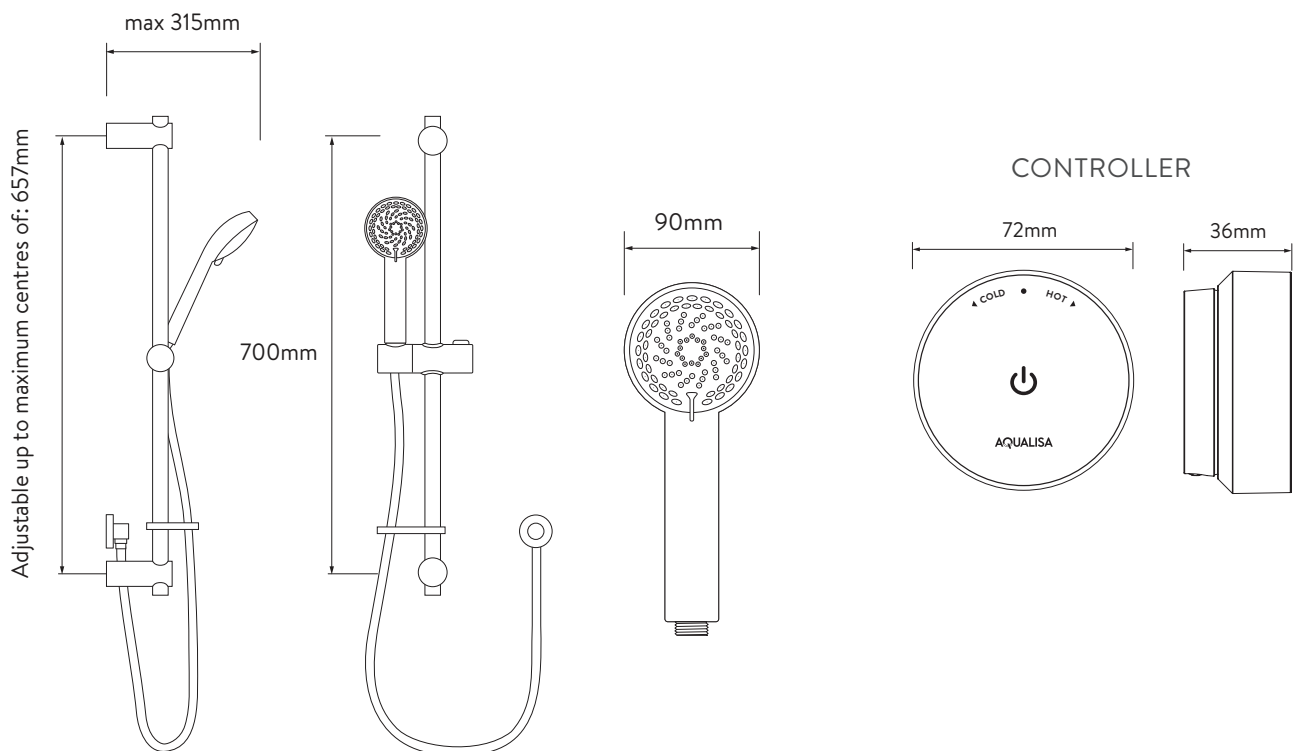

### AQUALISA SMARTVALVE™

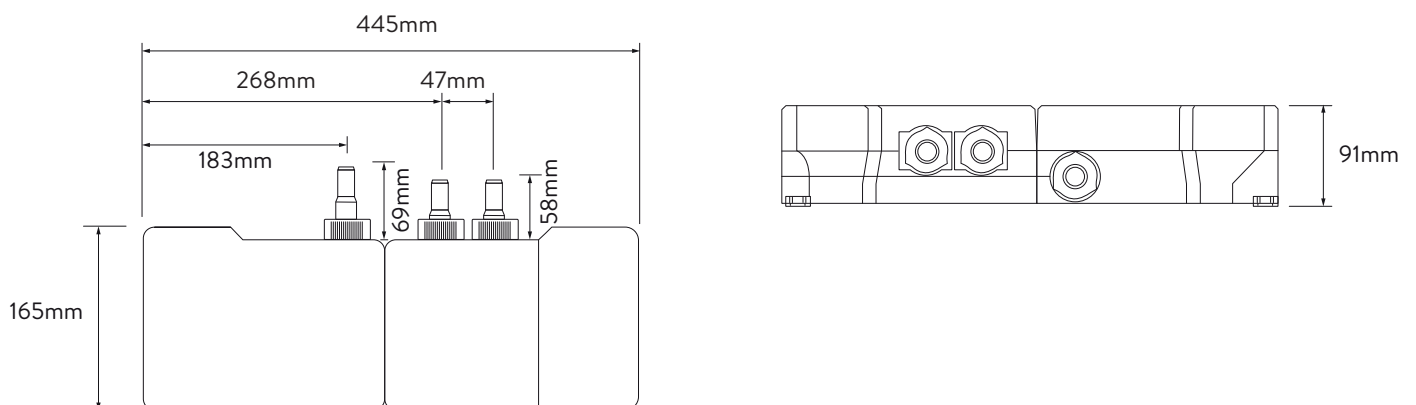

# AQUALISA

## QUARTZ BLUE™

### CONCEALED



WITH ADJUSTABLE HEAD - GRAVITY PUMPED

---

#### TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| Minimum pressure requirements                    | Aqualisa SmartValve™ must be sited no higher than the base level of the cold water cistern (Gravity Pumped)           |
| Maximum pressure requirements                    | 1bar (Gravity)  |
| Aqualisa SmartValve™ inlet fitting connections   | 15mm push fit   |
| Valve inlet centres                              | 48mm  |
| Inlet supply positions                           | Hot right, cold left  |
| Aqualisa SmartValve™ outlet fitting connection   | 15mm push fit   |
| Permissible Aqualisa SmartValve™ siting location | Loft, airing cupboard, under bath   |
| Supply temperature                               | Cold inlet temperature 1°C (minimum)<br>Cold inlet temperature 15°C (maximum)<br>Hot inlet temperature 65°C (maximum) |
| Water system                                     | Gravity   |
| Features   | One touch start/stop control  |
|  | LED display indicates when pre-selected temperature has been reached  |
|  | Wi-Fi & App compatible – control your product with your smart phone and smart home device e.g. Alexa, Google          |
|  | App functions include start/stop, shower timer, user dashboard, usage tracker and help & support                      |
|  | Aqualisa SmartValve™  |
|  | 90mm, 4 spray patterns (adjustable head) including eco-spray option   |
| Colour   | Chrome  |
| Guarantee period                                 | 5-year guarantee – shower unit  |
|  | 2-year guarantee – shower head and kit  |
| Approvals  | CE Marking  |
|  | BEAB  |